



DESCRIPTION

A versatile pressure switch suitable for many hydraulic and pneumatic applications. It utilizes a proven piston/diaphragm design to provide excellent accuracy and high proof pressures with zero leakage. Various electrical terminations are available utilizing a high quality snap action micro switch.

FEATURES

- Snap action micro switch
- Factory set or field adjustable
- Diaphragm/piston design for longevity
- Wide adjustment range
- High proof pressures

APPLICATIONS

- Hydraulic system control
- Material handling equipment
- Lubrication systems
- Garbage compactors

* UL available for certain models


Specifications

Electrical	5A [12/24 VDC, 125 VAC] or 3A [250 VAC]
Switch Type	Snap Action
Protection	DIN 43650A - IP65, Terminals - IP00
Temperature Range	-20°F to 180°F (-29°C to 82°C) Nitrile
Mechanical Range	1,000,000 Cycles @ 1000 PSI (69 BAR)
Diaphragm Material	Standard: Nitrile Optional: Viton, EPDM
Housing Material	Zinc Plated Steel (Optional Stainless Steel)
Maximum Overpressure	9000 PSI (620 BAR) 4700 PSI (324 BAR) for SMA-3 model
Repeatability	+/- 2% of full set point range at 20°C (68°F)
Differential	7 - 30% of setting
Weight	0.37 lbs (0.17 kg)

Pressure Range

Model	Adjustment Range	
	PSI	BAR
3	10 - 35	0.7 - 2.4
4	30 - 120	2.0 - 8.0
5	75 - 300	5.2 - 21
6	300 - 1200	21 - 83
7	1000 - 3000	69 - 207
8	2000 - 5000	138 - 345

Dimensions

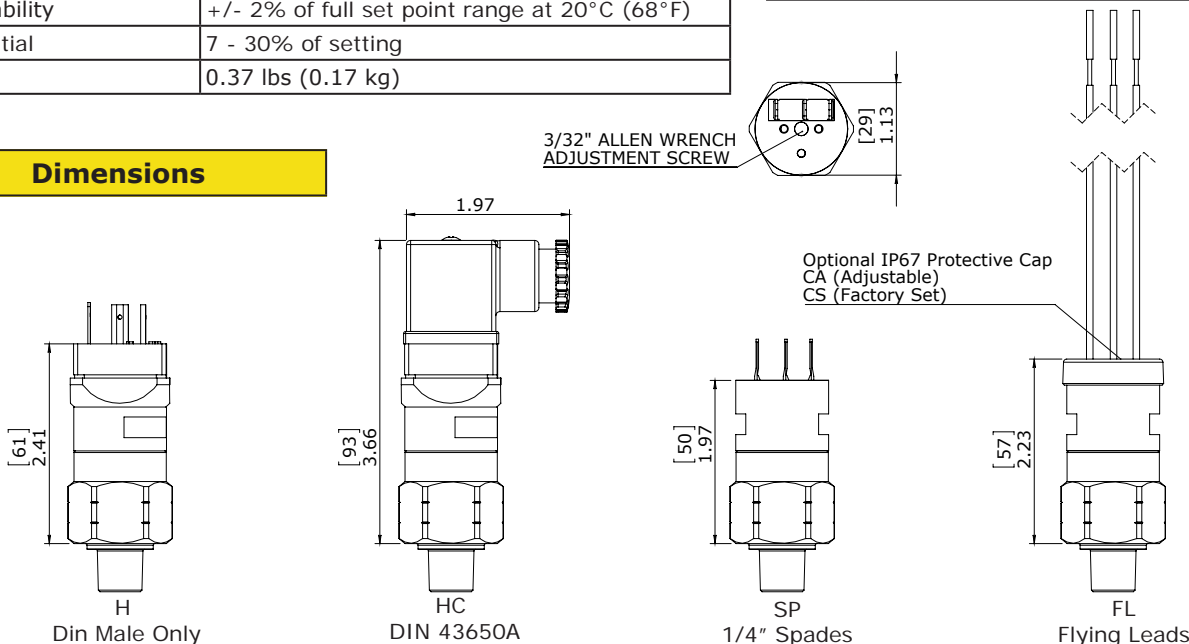

Wiring Code

CONTACT	FLYING LEADS	DIN 43650 TYPE	FLWF / FLWM		FLDR / FLDP	
			FLCM / FLCF / FLPM / FLPF			
			SPDT MODEL	SPST MODEL	SPDT MODEL	SPST MODEL
COMMON	BLACK	PIN 1	PIN A	PIN A	PIN A	PIN 1
NORMALLY CLOSED	BLUE	PIN 2	PIN C	PIN B	PIN C	PIN 2
NORMALLY OPEN	RED	PIN 3	PIN B	PIN B	PIN B	PIN 2

Ordering Information

Field Adjustable

SMA - ¹4 - ²2M - ³C - ⁴HC - ⁵1

Factory Preset

SMF - ¹30F - ²2M - ³C - ⁴HC - ⁵1

1 - Pressure Selection:

Field Adjustable - Select Model Code

Insert set point value XXX followed by: R, F, BR, or BF

Model	Adjustment Range	
	PSI	BAR
3	10 - 35	0.7 - 2.4
4	30 - 120	2.0 - 8.0
5	75 - 300	5.2 - 21
6	300 - 1200	21 - 83
7	1000 - 3000	69 - 207
8	2000 - 5000	138 - 345

OR

Set Point	Direction	Description
XXXX	R	PSI Rising Pressure
	F	PSI Falling Pressure
	BR	BAR Rising Pressure
	BF	BAR Falling Pressure

2 - Thread Options:

- 2M - 1/8 NPT male
- 4M - 1/4 NPT male
- 2G - 1/8 BSPP male, G1/8
- 4G - 1/4 BSPP male, G1/4
- 4S - 7/16-20 SAE male, with O-ring seal
- 4SLN - 7/16-20 SAE male, with O-ring seal, adjustable
- 6S - 9/16-18 SAE male, with O-ring seal
- M10 - M10 X 1.0 male
- M12 - M12 X 1.5 male

3 - Circuit:

- A - SPST (Normally Open)
- B - SPST (Normally Closed)
- C - SPDT (Single Pole Double Throw : Normally Open and Normally Closed)

4 - Electrical Termination:

- H - DIN 43650A - connector type - male half only (only available in SPDT option)
- HC - DIN 43650A - connector type (only available in SPDT option)
- HN - DIN 43650A 1/2" NPT Conduit (only available in SPDT option)
- FL - Flying Lead 18" long, 18 AWG
- FLWF - Flying Lead Weatherpack connector, female, Tower, 10" long leads
- FLWM - Flying Lead Weatherpack connector, male, Shroud, 10" long leads
- FLDP - Flying Lead Deutsch connector, plug, 10" long leads
- FLDR - Flying Lead Deutsch connector, receptacle, 10" long leads
- FLCM - Flying Lead Metripack, male, 150 series, 10" long leads
- FLCF - Flying Lead Metripack, female, 150 series, 10" long leads
- FLPM - Flying Lead Metripack, male, 280 series, 10" long leads
- FLPF - Flying Lead Metripack, female, 280 series, 10" long leads
- SP - 1/4" Spade

5 - Options:

- 1 - Viton® Diaphragm
- 2 - EPDM Diaphragm
- 3 - 316 Stainless Steel Housing
- 4 - HNBR Diaphragm
- 7 - Gold Contact, Snap Action Microswitch @ 20 mA/12 VDC
- 8 - 10 amp, Snap Action Microswitch @ 10(2) 125 VAC (inductive), 6(2) 250 VAC (inductive)
- 20 - Seal Adjustment Screw
- OC - Oxygen Cleaned Switches
- SR - Snubber
- CA - IP67 rated protective cover with a removable plug (For adjustable switches, SMA)
- CS - IP67 rated protective cover (For factory set switches, SMF)



Note: Please see page 46 for other available options